


Rivet Etanche Alu Acier

Tête Fraisée

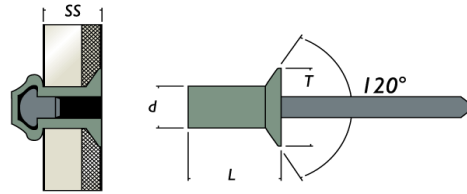

Corps : Alu (AL Mg 5)

Tige : Acier Zingué

D ₁ (mm)	L corps (mm)	Plage serrage (mm)	D perçage (mm)	D ₂ tête (mm)	Résistance traction (DaN)	Résistance cisaillement (DaN)	Boîtage
3,2	7,5	0,5-3,0	3,3	6	124	107	1000
	9	3,0-4,5					1000
	10,5	4,5-6,0					1000
	12	6,0-7,5					1000
4	9,5	0,5-4,5	4,1	8	215	160	1000
	11	4,5-6,5					1000
	12,5	6,5-8,0					1000
	14	8,0-9,5					1000
4,8	9,5	1,0-4,5	5	9,5	310	230	500
	11	4,5-6,5					500
	12,5	6,5-8,0					500
	14	8,0-9,5					500
	15,5	9,5-11,0					500
	19	11,5-14,5					500
	23,5	15,5-16,0					500